

## FRED Modules




**V<sub>RRM</sub>** 700V

**I<sub>FAV</sub>** 300 A

### Applications

- Inversion Welder
- Uninterruptible Power Supply (UPS)
- Plating Power Supply
- Ultrasonic Cleaner and Welder
- Power Factor Correction (PFC) Circuit
- Converter & Chopper

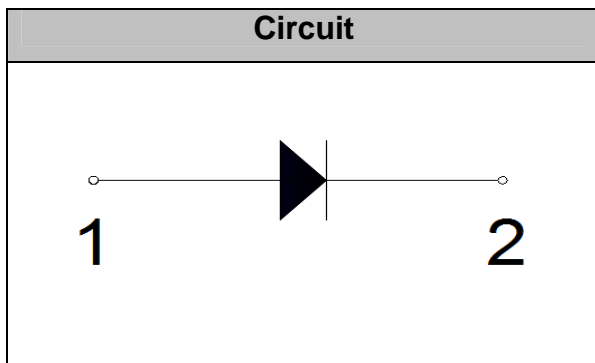

### Features

- Soft Reverse Recovery Characteristics
- Ultrafast Reverse Recovery Time
- Low Reverse Recovery Loss
- Low Forward Voltage
- High Surge Current Capability
- Low Inductance Package

### Maximum Ratings

Symbol	Conditions	Values	Units
$V_R$		700	V
$V_{RRM}$		700	V
$I_{F(AV)}$	$T_C=110^{\circ}\text{C}$ ,	300	A
$I_{F(RMS)}$	$T_C=110^{\circ}\text{C}$ ,	420	A
$I_{FSM}$	1/2 Cycle , 50Hz, Sine	5000	A
	1/2 Cycle , 60Hz, Sine	5500	A
$I^2t$	$T_J=45^{\circ}\text{C}$ , t=10ms, 50Hz, Sine	12500	$\text{A}^2\text{s}$
	$T_J=45^{\circ}\text{C}$ , t=8.3ms, 60Hz, Sine	15120	$\text{A}^2\text{s}$
$P_D$		1136	W
$T_J$		-40 to +150	$^{\circ}\text{C}$
$T_{STG}$		-40 to +125	$^{\circ}\text{C}$
Torque	Module-to-Sink Recommended (M6)	3~4.7	N·m
Torque	Module Electrodes Recommended (M6)	3~4.7	N·m
Weight		130	g

### Thermal Characteristics

Symbol	Conditions	Values	Units
$R_{th(j-c)}$	Per Module	0.12	$^{\circ}\text{C/W}$

## Electrical Characteristics

Symbol	Conditions	Values			Units
		Min.	Typ.	Max.	
$I_{RM}$	$V_R=700V$	--	--	0.5	mA
	$V_R=700V, T_J=125^\circ C$	--	--	2	mA
$V_F$	$I_F=300A$	--	1.2	1.6	V
	$I_F=300A, T_J=125^\circ C$	--	1.1	1.45	V
$t_{rr}$	$I_F=1A, V_R=30V, di_F/dt=-200A/\mu s$	--	72	--	ns
$t_{rr}$	$V_R=350V, I_F=300A, di_F/dt=-200A/\mu s, T_J=25^\circ C$	--	180	--	ns
$I_{RRM}$		--	15	--	A
$t_{rr}$	$V_R=350V, I_F=300A, di_F/dt=-200A/\mu s, T_J=125^\circ C$	--	440	--	ns
$I_{RRM}$		--	35	--	A

## Performance Curves

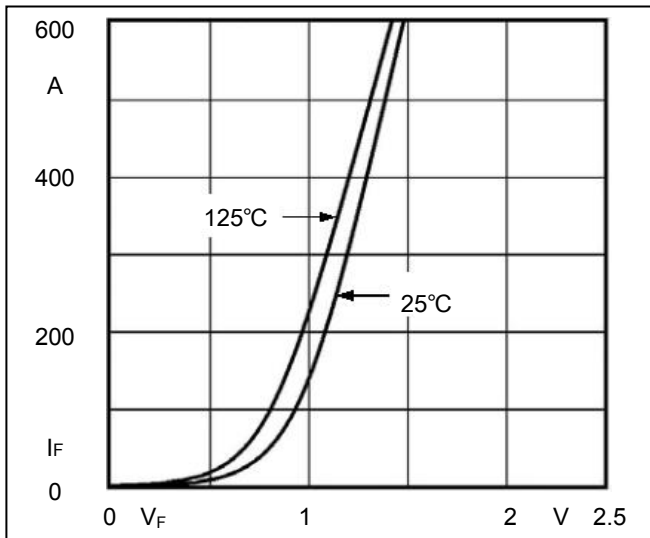


Fig1. Forward Voltage Drop vs Forward Current

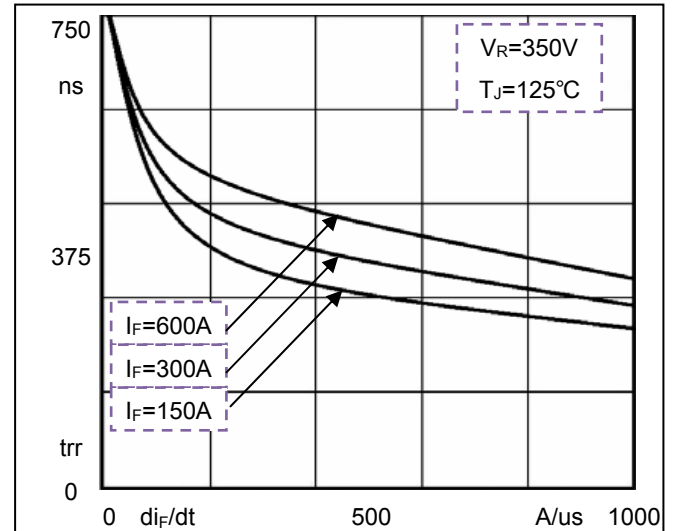


Fig2. Reverse Recovery Time vs  $di_F/dt$

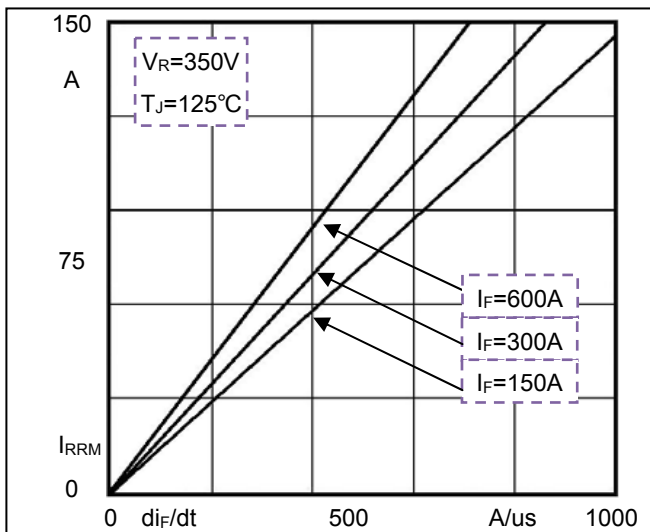


Fig3. Reverse Recovery Current vs  $di_F/dt$


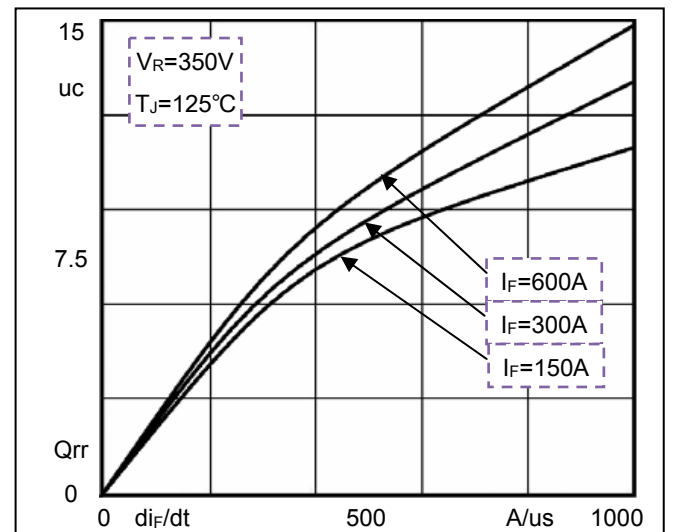


Fig4. Reverse Recovery Charge vs  $di_F/dt$

## Package Outline Information

CASE: F6

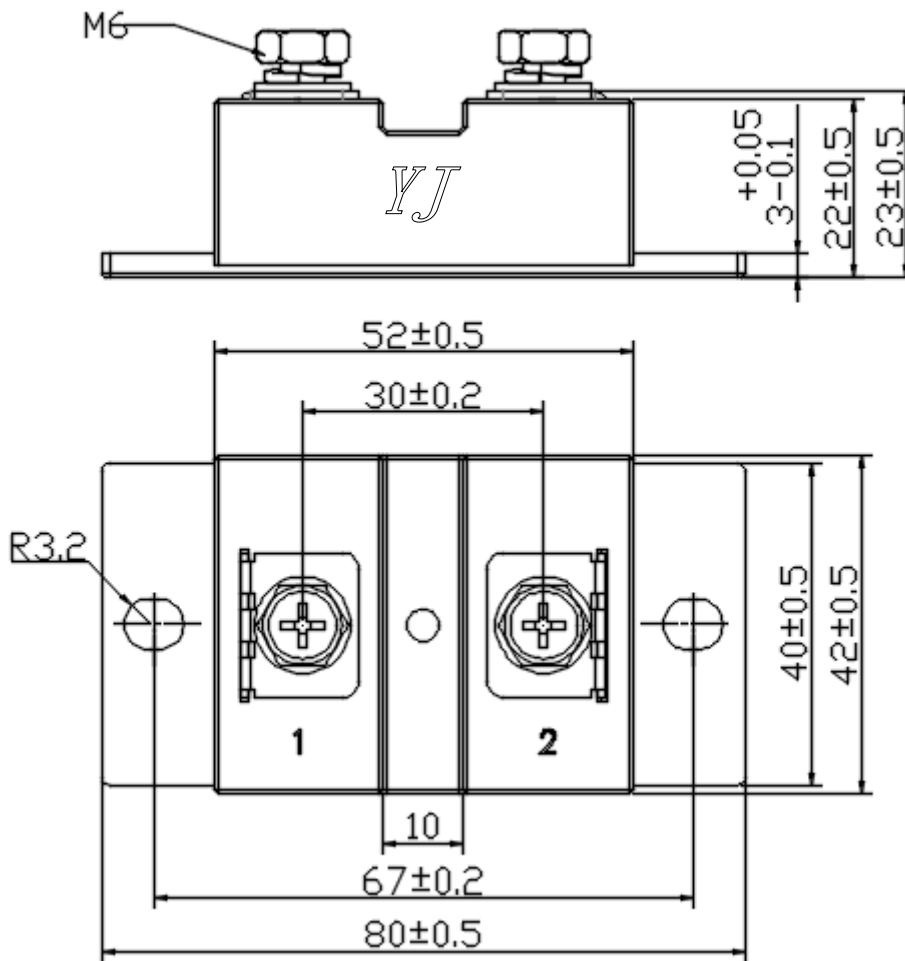

Dimensions in mm